

AIT5000-SG High-Precision Current Transducer

AIT5000-SG has a high gain and measurement accuracy in the full bandwidth range, due to the application of the multi-point zero-flux technology system and high-frequency ripple sensing channel on top of currently existing DC sensor technology.

The multi-point zero-flux technology system secures the high accuracy by utilizing the technology combination of exciting magnetic flux closed-loop control, self-excited magnetic flux gate and multi-closed-loop control that realizes the closed-loop control between excitation magnetic flux and AC/DC magnetic flux generated by primary current, while the high-frequency ripple sensing channel allows the sensor to have the high performance over the full bandwidth range.

Product photo





1

SHENZHEN HANGZHI PRECISION ELECTRONICS CO. LTD Add: Rm 531, Building B, Huayuan Hi-Tech Innovation Park, Baoyuan Road, Bao'an District, Shenzhen, China P.R. Email: sales@hangzhicn.com Tel: +86(0)755-8259 3440 Website: www.hangzhicn.com



Key Technologies

- Excitation closed-loop control technology
- ♦ Self-excitation demagnetization technology
- ♦ Multi-point zero-flux technology
- ♦ Temperature control compensation technology
- ♦ Multi-range automatic switching technology

Features

- Insulated measurement between primary and secondary side
- \diamond Excellent linearity and accuracy
- Extremely low temperature drift
- ♦ Extremely low zero drift
- \diamond Broad band and low response time

♦ Rail Transit: EMU, Metro, Trolly car

Ship: Electric driven ship

Strong anti-electromagnetic interference


Application Domain

- Medical Equipment: Scanner, MRI
- \diamond Power industry: Converter, Inverter
- ♦ Renewable Energy: Photovoltaic, Wind energy ♦ Car: Electric car
- ♦ Testing Instrument: Power analyzer, High-precision power supply
- ♦ Smart Power Grid: Power generation and battery monitoring, Medium low voltage substation
- ♦ Industry Control: Industrial motor drive, UPS, Welding, Robot, Hoist, Elevator, Ski lift

Electrical Performance

Parameter	Symbol	Measuring Conditions	Min	Тур	Мах	Unit
Primary nominal direct current	IPN_DC	—	—	±5000	5500	Adc
Primary nominal alternating current*	IPN	_	—	3536	3889	Aac
Operating voltage	Vc	—	—	220	—	Vac
Power consumption current	IPWR	Rated primary current	—	—	210	mA
Current ratio	K _N	Input : Output	5000:1	5000:1	5000:1	—
Rated output current	Isn	Rated Primary current		±1.0		А
Measuring resistance	Rм		0	1	1.5	Ω

* refers to AC effective value





Accuracy Measurement

Parameter	Symbol	Measuring Conditions	Min	Тур	Мах	Unit
Accuracy	X _G	Input direct current, 25±20°C	—	—	50	ppm
Linearity	٤L	_	—	—	30	ppm
Temperature stability	Tc	—	—	—	0.1	ppm/K
Time stability	T⊤	_	—	—	0.2	ppm/month
Power supply interference	Τv	-	—	—	1	ppm/V
Zero offset current	lo	@25°C	—	_	1 (can be adjusted to zero by users)	ppm
Ripple current	I _N	DC-10Hz	—	—	0.5	ppm
Dynamic response time	tr	di/dt=100A/us, rised to 90%I _{PN}	—	—	1	us
Current change rate	di/dt	—	100	—	—	A/us
Frequency bandwidth (-3dB)	F	_	0	_	300	kHz
Zero offset current	Іот	Full temperature range	—		±5	μA


Safety Characteristics

Parameter	Symbol	Measuring Conditions	Value	Unit
Insulation voltage / Between primary and secondary sides	Vd	50Hz,1min	5	KV
Transient isolation withstand voltage / Between primary and secondary sides	Vw	50us	10	KV
Creepage distance / Between the primary and the outer shell	dCp	—	11	mm
Clearance distance / Between the primary and the outer shell	dCi	—	11	mm
Comparative tracking index	CTI	IEC-60112	600	V

General Characteristics

Parameter	Symbol	Measuring Condition	Min	Тур	Max	Unit
Ambient operating temperature	T _A	-	-40	—	+85	°C
Mass	М	—	_	17500±200		g

SHENZHEN HANGZHI PRECISION ELECTRONICS CO. LTD Add: Rm 531, Building B, Huayuan Hi-Tech Innovation Park, Baoyuan Road, Bao'an District, Shenzhen, China P.R. Email: sales@hangzhicn.com Tel: +86(0)755-8259 3440 Website: www.hangzhicn.com





Operating Status Instructions

Normal status:

The green indicator is on when the device is running normally.

♦ Fault status:

The green light will be off when the transducer is in fault mode.

Trouble-shooting:

a) When the green light is off, the power supply should be checked as the first step;

b) If the power supply is normal, then the primary current is over the specified measurement range and the transducers will be in overload mode.

In this mode, the transducers will be working in non-zeroflux mode, that the secondary current remains at specified maximum output, the secondary and primary currents are not in proportional. When the measuring current returns to the specified measurement range, the output current will return to normal and the green light will be on.

Instructions

The steps are as follows:

Step 1: Connect the transducer and the control box through a dedicated connection line.

Step 2: Insert the AC 220V power plug into the control box and turn on the power supply switch Step 3: Pass the current cable to be tested through the transducer and pay attention to the current direction.

Step 4: The current output interface is connected to the current measuring instrument or current sampling circuit. Note that the sampling resistance value cannot exceed the maximum limit value.

Connection System

1. Control box power supply wiring:

The power interface of the control box is directly connected to the 220V power supply;

Red terminal: the positive side of the secondary current output;

Black terminal: the negative side of the secondary current output;

2. Connection of control box and winding coil

Insert the D-Sub9 male connector on the winding coil directly into the D-Sub9 female connector of the control box and fix it with screws.

Δ

3. Test description:


By measuring the test current I_s flowing through R_M , or the voltage U_R across R_M , The primary current I_P can be obtained:


$$I_P = K_N * I_S = K_N * (U_R / R_M)$$




Dimensions








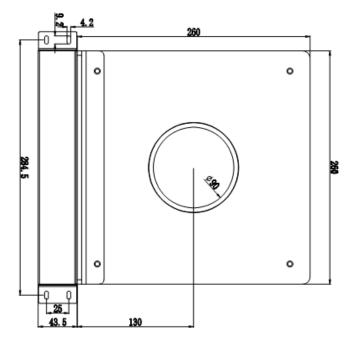


SHENZHEN HANGZHI PRECISION ELECTRONICS CO. LTD

Add: Rm 531, Building B, Huayuan Hi-Tech Innovation Park, Baoyuan Road, Bao'an District, Shenzhen, China P.R. Email: sales@hangzhicn.com Technical support: info@hangzhicn.com Tel: +86(0)755-8259 3440 Website: www.hangzhicn.com





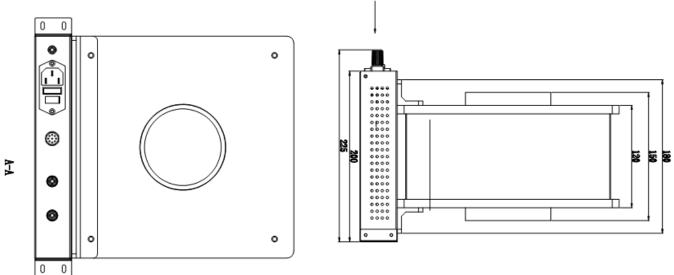

SHENZHEN HANGZHI PRECISION ELECTRONICS CO. LTD Add: Rm 531, Building B, Huayuan Hi-Tech Innovation Park, Add. Rin 551, Building B, Hudydan Hirtech Innovation Park,Baoyuan Road, Bao'an District, Shenzhen, China P.R.Email: sales@hangzhicn.comTel: +86(0)755-8259 3440Website: www.hangzhicn.com

